



safetoe
TOP QUALITY SINCE 1984

Top Quality
Creative Design
Amazing Comfort



Keep Worker in Safety

L-7163 S3 SRC

Heavy Duty Safety Shoes

Upper : High Quality Water Resistant Cow Leather

Lining : Breathable Sandwich Air Mesh

Insole : Comfortable EVA Coated Mesh

Outsole : Rubber Cement Sole (Slip Resistant)

Toecap : Steel Toecap

Penetration : Steel Midsole Plate

Size : EU 37-47#, UK 3-13#, US4-14#

CE EN ISO 20345:2011 SBP SRC/HRO

Application : Construction, Logistics, Mechanics, Workshop, Oil & Gas Industry, Chemical Factory, Mining etc



Oil Resistant



200 JOULE
TOECAP



SLIP-
RESISTANT



SHOCK
ABSORPTION



ANTI-STATIC



ANTI-NAIL
MIDSOLE



PETROL AND
CHEMICAL
RESISTANT



WATER
RESISTANT



OIL
RESISTANT



EXTRA
WIDE

Steel Toecap Protection • AN1-EN12568

Stainless steel toe cap can reach 200 joules from falling or rolling objects. It is stronger than iron toe cap.



Flex

Steel Midsole Plate Protection • AN1-EN12568

Steel midsole plate, is zero-penetration resistant. It can resist 1100 newtons nail puncture from sharp objects. It is stronger and more flexible than normal iron plate.



Water Resistant Cow Leather Upper • CE EN ISO 20345:2011

High quality cow embossed leather with thickness 1.6-1.8mm. It is treated with water resistant coating to protect feet from raining workday. Tear strength is required 10% higher than Europe test requirement, to reach longer lifespan.




Heavy Duty Rubber Outsole • CE EN ISO 20345:2011

The outsole is made with natural rubber plus 10-15% nitrile. The sides are stitched with kevlar thread, to enhance bond strength between upper & outsole. The rubber material is designed to use at oil & gas resistant workplaces. It can pass SRC slip-resistant test.

Sole Bonding Strength Test

- EN ISO 20344:2011, 5.2 (Between Upper & Sole)
- Average Test Result 5.8 ± 5 (N/mm)

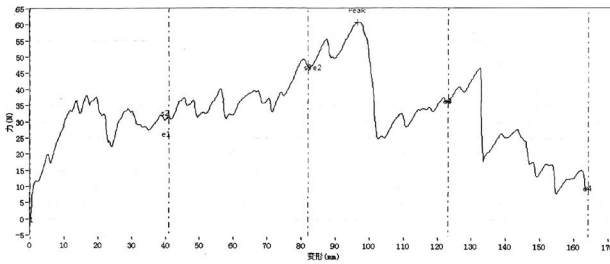

Upper, Lining & Bonding Strength Test Result

| | |
|-----------------------------------|------------------------|
| Leather Tear Strength \geq | 120.0 Newtons |
| Leather Tensile Properties \geq | 15.0 N/mm ² |
| Lining Tear Strength \geq | 15.0 N/mm |
| Bonding Strength \geq | 4.0 N/mm |

| ✓ Protection With Slip Resistant (SRC) | Result |
|--|--|
| Test Requirement : SRA (Eurotile 2+Nal S) Forward Heel Slip ≥ 0.28 & Forward Flat Slip: ≥ 0.32 SRB (Steel Floor+Glycerine) Forward Heel Slip ≥ 0.13 & Forward Flat Slip: ≥ 0.18 | PASS |
| Standards : EN ISO20344:2011(5.11) , SRC Means both SRA & SRB requirements are fulfilled. | |
| ✓ Protection With Anti-Static | Result |
| Test Requirement : Anti-static 100K Ω -1000M Ω , Test Voltage: 100 \pm 2 V DC, Test Period: 1 Minute | PASS |
| Standards : EN ISO 20344:2011(5.10) Dry Humility (30 \pm 5) & Wet Humility (85 \pm 5) | |
| ✓ Protection Resistant to Fuel Oil | Result |
| Test Requirement : Change in Volume and Change in Hardness (Outsole) is No More Than +12%(*) | PASS |
| Standards : EN ISO 20344:2011(8.6.1) | |
| SAFETOE Standard Package Instruction (Average 42# for Reference) | |
| Shoes Weight : 1.2-1.3 KGS /Pair | Carton Weight : 13-14 KGS /Carton |
| 1 Pair / Color Box , Dimensions : 32 \times 21 \times 12CM | 10 Pair / Carton , Dimensions : 62 \times 43 \times 33CM |



User Instructions:

- 1.) RECOMMENDED TO USE : Construction, Logistics, Mechanics, Glasses Installation, Workshop, Farming, Oil & Gas, Chemical Factory, Mining etc.
- 2.) LIMITATION TO USE: It is very important that footwear selected must be suitable for the right workplaces. The protection against risks or hazards which are not mentioned in this document is not warranted.
- 3.) FITTING & SIZE: All footwear are marked with standard size on tongue label. Some are with different size comparison, such as EU size, UK size, US size etc. Please wear footwear in a suitable size.

- 4.) STORAGE: Keep the footwear in its original packaging, under ordinary temperature, non-humidity conditions and in clean, covered and ventilated premises.
- 5.) CLEANING: Clean footwear regularly by high quality cleaning treatments recommended as suitable for the purpose. Don't use caustic or corrosive cleaning agents.